

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/76173 A1(51) International Patent Classification⁷: H04L 29/06,
H04Q 7/22

(21) International Application Number: PCT/US00/15662

(22) International Filing Date: 6 June 2000 (06.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 09/327,102 7 June 1999 (07.06.1999) US

(71) Applicant: QUALCOMM INCORPORATED [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).(72) Inventor: LIOY, Marcello; 7588 Charmant Drive #1924,
San Diego, CA 92122 (US).

(74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**Published:**

— With international search report.

— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ESTABLISHING A PACKET NETWORK CALL BETWEEN A MOBILE TERMINAL DEVICE AND AN INTERWORKING FUNCTION



(57) Abstract: A method or system (10) establishes a packet network call over a transmission link extending between a mobile terminal device (12) and an interworking function (18) which comprises a gateway or bridge connection to a network, such as a packet network. The transmission link connects the mobile terminal device (12) to a wireless communication device (14) over a first interface (Rm) and further connects the wireless communication device to the interworking function over a second interface via a wireless link (Um) to a base station (16). The packet network call, once established, comprises a first interface data link formed within a predetermined data link layer across the first interface (Rm) and a second interface data link formed within the predetermined data link layer across the second interface. A flow control is asserted (304) and deasserted (310) on the mobile terminal device (12). During the flow control, the wireless communication device performs a linked control protocol negotiation with the interworking function to establish the second interface data link with the interworking function (18). After the second interface data link is established, and during the flow control, the wireless communication device (14) performs a network control protocol negotiation with the interworking function to establish a second interface network link carried by the second interface data link.

ESTABLISHING A PACKET NETWORK CALL BETWEEN A MOBILE TERMINAL DEVICE AND AN INTERWORKING FUNCTION

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention relates to protocols and systems for establishing a packet switched network model connection between a mobile terminal device and a packet network via a wireless connection formed between a wireless
10 communication device and a base station.

II. Description of Background Information

Mobile computing generally involves the use of mobile terminal devices such as notebook computers connected to computing resources via a wireless
15 communication device. As mobile computing becomes more prevalent, traveling users will be provided continuous connectivity, and thus full access, to their computing resources -- data and files stored at their office LAN, email servers, etc. To make this a reality, efforts abound to develop and introduce new data services and technologies.

20 FIG. 1 is a block diagram of a simplified network reference model applicable to mobile computing data services. The model shows select network entities forming a communications subsystem 10. A mobile terminal device 12 is coupled to a wireless communication device 14, which is in turn connected to a base station/mobile switching center 16 via a wireless interface. Base
25 station/mobile switching center 16 is connected to an interworking function 18. The simplified network reference model is described in the document entitled "Data Service Options for Wideband Spread Spectrum Systems," TIA/EIA/IS-707, Published Version (February 1998), (hereinafter referred to as "IS-707") as well as in the newer version thereof, i.e., IS-707-A. The content of each of IS-707
30 and IS-707-A is hereby expressly incorporated by reference herein in its entirety.

According to IS-707, mobile terminal device 12, wireless communication device 14, base station/mobile switching center 16, and interworking function 18 are respectively referred to as a TE2 device, an MT2 device, a BS/MS, and

an IWF. The interface between mobile terminal device 12 and wireless communication device 14 is called an Rm interface. The interface between wireless communication device 14 and base station/mobile switching center 16 is referred to as a Um interface. The interface between base station/mobile switching center 16 and interworking function 18 may be implemented with an L interface.

Mobile terminal device 12 may comprise, for example, a notebook computer, a personal digital assistant, or any other computing device capable of computer network communications, including packet-based communications or communications via a dial-up modem. Wireless communication device 14 may comprise, for example, a wireless terminal used by subscribers to access network services over a radio link. The wireless terminal may comprise a handheld cellular telephone, or a unit installed in a vehicle. Wireless communication device 14 may also be fixed to a particular location.

Base station/mobile switching center 16 is shown in FIG. 1 as a single functional entity, although it need not be. The base station portion of the illustrated base station/mobile switching center allows wireless communication device 14 to access network services using a radio link or another type of wireless link. The mobile switching center portion handles the switching of traffic between the wireless link and a telecommunications network to which the wireless link is connected. The telecommunications network may comprise one or a combination of PSTN, ISDN, internet routers, and other network types and network entities.

Interworking function 18 represents the point at which a gateway or bridge connection is formed between mobile terminal device 12 and/or wireless communication device 14 at one end and an internetwork at the other end.

FIG. 2 is a simplified diagram of a protocol stack adhered to by many mobile computing environments, including those adhering to IS-707, RFC 1332, "The PPP Internet Protocol Control Protocol (IPCP)" (May, 1992), RFC 1661, "The Point-To-Point Protocol (PPP)" (July, 1994), and RFC 2002, "IP Mobility Support" (October, 1996). The stack comprises one or more lower layer(s) 28, a data link layer 26, a network layer 24, and one or more upper layers 22. One or more lower layers 28 are provided, including, at the lowest layer, connections

establishing a physical link. The relay layer disclosed in IS-707 is included in these lower layers above the physical layer.

5 Data link layer 26 is immediately above lower layer(s) 28. Data link layer 26 may utilize such protocols as PPP and/or SLIP. This layer deals with point-to-point communications between computers. It packages addressing data and manages the flow of transmissions. PPP (the point-to-point protocol) is described, for example, in RFC 1332 (May, 1992), the content of which is hereby expressly incorporated by reference herein in its entirety. PPP facilitates the transmission of datagrams between data communications equipment from different manufacturers over dial-up and dedicated serial point-to-point links. PPP can simultaneously transmit multiple protocols across a single serial link, without the need to set up a separate link for each protocol. PPP also allows the interconnection of dissimilar devices, such as host bridges and routers, over serial links. The PPP protocol is comprised of three main components, including an encapsulation scheme, a link control protocol, and network control protocols. These components are respectively responsible for creating the frame, controlling the link, and managing the network layer protocol.

20 Network layer 24 is just above data link layer 26, and may comprise such protocols as IP or CLNP. The network layer ensures that information arrives at its intended destination. That is, it is concerned with the actual movement of information from one network entity to another. The network layer is responsible for getting data from one computer to another. The internet protocol (IP) breaks up data messages into packets, routes the packets from a sender to a destination network entity, and reassembles the packets into the original data messages at the destination. The IP protocol contains an IP header which contains source and destination address fields that uniquely identify host computers respectively acting as the source and destination of the packets being transferred.

30 Upper layer(s) portion 22 comprises one or more protocol layers above network layer 24, including, for example, the TCP (transmission control protocol) protocol which is responsible for reliable, in-order delivery of data from one application to another.

Two types of mobile data calls may be placed by a mobile terminal device 12 through a wireless communication device 14: circuit switched

(including fax calls) and packet switched. In a circuit switched mobile data call, a circuit switched connection is made between mobile terminal device 12 and a given target network. Mobile terminal device 12 makes this connection by establishing a dial-up modem connection directly over a circuit switched
5 network to a modem-accessible target network -- e.g., to an internet service provider (ISP) or to an office network or LAN. In a packet switched call, a direct connection is established between mobile terminal device 12 at one end and a packet network at the other end through interworking function 18.

There are generally two modes of operation in which packet switched
10 calls can be placed: the network model and the relay model. In a relay model packet call, a packet switched connection is made between mobile terminal device 12 and the network through interworking function 18, while wireless communication device 14 acts as a conduit, at the physical layer. Accordingly, if there is a change in the connection between interworking function 18 and
15 wireless communication device 14 (e.g., the physical link therebetween is temporarily interrupted), the call may be dropped between mobile terminal device 12 and interworking function 18.

On the other hand, in a network model packet call, two separate PPP links are provided at the data link layer: a first interface data link is formed
20 within the data link layer across the Rm interface, and a second interface data link is formed within the data link layer across the Um interface (as well as across the L interface). The separate PPP links help support "transparent mobility;" that is, the mobile terminal device 12 does not need to know when its location changes so as to affect the link between wireless communication device
25 14 and interworking function 18. In other words, the network model mode of operation prevents changes over the Um link from affecting the Rm link, as the Rm link is isolated from the Um link. This helps with the support of transparent mobility. Another benefit is that the TE2 is protected from arbitrary PPP renegotiations.

30 The establishment of separate and isolated PPP links at the data link layer over the Rm and the Um interfaces is only part of what is necessary to support transparent mobility. A network layer connection must also be established between mobile terminal device 12 and interworking function 18 at the network layer in a way that still supports transparent mobility.

III. Definitions of Acronyms and Terms

The following term and acronym definitions are provided to assist the reader in obtaining an understanding of the invention as described herein.

5 Flow Control: Performed by the receiving entity to limit the amount or rate of data

sent to it by a transmitting entity or to ignore messages it receives while keeping the transmitting entity unaware that it is being ignored.

10 Interworking Function (IWF): A point at which a gateway or bridge connection is formed between a given network (e.g., a packet network) and mobile devices coupled to the network by way of a base station and/or a mobile switching center.

SUMMARY OF THE INVENTION

15 In view of the above, the present invention, through one or more of its various aspects and/or embodiments, is thus presented to bring about one or more objects and advantages. One such object is to provide mechanisms and protocols which facilitate the establishment of a packet link between a mobile terminal device and a network via an interworking function, while supporting
20 transparent mobility so that changes over the Um link do not affect the Rm link. A further object of the present invention is to provide such mechanisms and protocols which also allow for IP mobility support.

25 The present invention, therefore, is directed to a system or a method for establishing a packet network call over a transmission link extending between a mobile terminal device and an interworking function. The transmission link connects the mobile terminal device to a wireless communication device over a first interface, and further connects the wireless communication device to the interworking function over a second interface via a wireless link to a base station. The packet network call, once established, comprises a first interface
30 data link formed within a data link layer across the first interface and a second interface data link formed within the data link layer across the second interface. A flow control is asserted and deasserted on the mobile terminal device, and during the flow control, the wireless communication device performs a link control protocol negotiation with the interworking function to establish the

second interface data link with the interworking function. After the second interface data link is established, and during the flow control, the wireless communication device performs a network control protocol negotiation with the interworking function entity to establish a second interface network link carried by the second interface data link, resulting in an IP address being assigned to identify the mobile terminal device. After the second interface data link is established, the mobile terminal device performs a link control protocol negotiation with the wireless communication device to establish the first interface data link with the wireless communication device. After the first interface data link and the second interface network link are each established, the mobile terminal device performs a network control protocol negotiation with the wireless communication device to establish a first interface network link carried by the first interface data link, utilizing the same IP address assigned during the network control protocol negotiation with the interworking function.

Other acts are performed after the first interface and the second interface network link are each established, when the wireless communication device receives a request for a static IP address from the mobile terminal device. A determination is made as to whether mobile IP is supported by the packet network, and when mobile IP is not supported, the other acts are not performed. During a flow control on the mobile terminal device, the wireless communication device performs a network control protocol renegotiation with the interworking function to reestablish the second interface network link carried by the second interface data link using the static IP address. A network protocol negotiation is thereafter performed between the mobile terminal device and the wireless communication device to establish the first interface network link using the static IP address.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is further described in the detailed description which follows, by reference to the noted plurality of drawings by way of non-limiting examples of embodiments of the present invention, in which like reference numerals represent similar parts throughout the several views of the drawings, and wherein:

FIG. 1 is a block diagram of a mobile computing communications subsystem;

FIG. 2 is a simplified diagram of a protocol stack structure;

FIG. 3 is a protocol flow diagram;

5 FIG. 4 is a protocol flow diagram; and

FIG. 5 is a protocol flow diagram per an alternate embodiment.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

10

The present invention concerns itself with the establishment of a data link layer link (a data link) and a network layer link (a network link) between mobile terminal device 12 and interworking function 18. In the illustrated embodiment, each of these links is formed using the PPP protocol. The PPP protocol comprises an initial link establishment phase, during which a data link is established using a link control protocol (LCP), and a network layer protocol phase, during which a network link is established using a network control protocol (NCP).

15 As described in RFC 1661, during the initial link establishment phase, LCP packets are exchanged between the two entities between which a data link is to be established. The LCP packets comprise a Configure-Request packet, a Configure-Ack packet, a Configure-Nak packet, and a Configure-Reject packet. The format of these packets is well known and described in RFC 1661.

The Configure-Request packet is used to negotiate configuration options.

25 The Configure-Ack packet is transmitted if every configuration option in a received Configure Request packet is recognizable and all values are acceptable. The Configure-Nak packet is sent in response to a Configure-Request packet when the requested configuration options are recognizable, but some of the values are not acceptable. The Configure-Nak packet comprises an Options field which is filled only with the unacceptable configuration options requested by the Configure-Request packet. The Configure-Reject packet is sent when a received Configure-Request packet includes configuration options that are unrecognizable or are not acceptable for negotiation. The Configure-Reject packet comprises an Option field which contains only the unacceptable configuration options from the Configure-Request packet.

30

35

During the subsequent network layer protocol phase, NCP packets are exchanged between the two entities between which a network link is to be established. The internet protocol control protocol (IPCP) is a network control protocol, responsible for configuring, enabling, and disabling an internet
5 protocol (IP) network link. The IPCP network control protocol is described in RFC 1332. IPCP configuration options include IP-address and IP-compression-protocol. An IPCP negotiation uses the same type of configure packet negotiation mechanism as that described above for LCP. Accordingly, an IPCP negotiation utilizes packets including a Configure-Request packet, a Configure-
10 Ack packet, a Configure-Nak packet and a Configure- Reject packet. The results of the IPCP negotiation include both IP-compression-protocol configuration information as well as an IP address to be used on the local end of the link. The sender of a Configure-Request states which IP-address is desired or requests that the peer provide it an IP address. The peer can provide this
15 information by NAKing the option, and returning a valid IP-address.

Figs. 3 and 4 comprise diagrams which illustrates the flow of a protocol for establishing a packet network call over a transmission link extending between a mobile terminal device 12 and an interworking function 18 via a wireless communication device 14. The transmission link connects mobile
20 terminal device 12 to a wireless communication device 14 over a first interface which comprises the Rm interface, and further connects wireless communication device 14 to interworking function 18 over a second interface which comprises the Um interface. The packet network call, once established, comprises a first interface data link formed within a data link layer across the
25 Rm interface, and a second interface data link formed within the data link layer across the Um interface.

Referring now to FIG. 3, the establishment of data and packet links between a mobile terminal device 12 and a network via interworking function 18 is initiated by mobile terminal device 12. More specifically, mobile terminal
30 device 12 will send an LCP configure packet 302 to mobile communication device 14. Mobile communication device 14 will then forward an assert flow control communication 304 to mobile terminal device 12, at which point a flow control will be performed on mobile terminal device 12. During the flow control, wireless communication device 14 will then perform an LCP

negotiation 306 with interworking function 18 to establish the Um (second) interface data link (a PPP link) with interworking function 18.

After the Um interface data link (PPP link) is established, and during the flow control, wireless communication device 14 will perform a network control
5 protocol negotiation 308 with interworking function entity 18. More specifically, an IPCP negotiation 308 will be performed with interworking function 18 to establish a Um (second) interface network link (IP link within the network layer) carried by the second interface data link. One of the results of this negotiation will include an IP address which is assigned to identify mobile
10 terminal device 12.

Subsequently, a deassert flow control communication 310 will be sent from wireless communication device 14 to mobile terminal device 12, at which point the flow control will be terminated. Then, an LCP negotiation 312 will be performed between mobile terminal device 12 and wireless communication
15 device 14 to establish a PPP link which comprises the Rm (first) interface data link between wireless communication device 14 and mobile terminal device 12. After the Rm interface data link is established between wireless communication device 14 and mobile terminal device 12, mobile terminal device 12 will perform an IPCP negotiation 314 with wireless communication device 14 to
20 establish a Rm (first) interface network link (an IP link within the network layer) carried by the Rm (first) interface data link, using the IP address obtained during the IPCP negotiation 308 between wireless communication device 14 and interworking function 18.

If a mobile IP call is being made by mobile terminal device 12, and
25 wireless communication device 14 has mobility support, certain other communications are performed after the Rm (first) interface data link is established.

In the IPCP negotiation 314 shown in the protocol flow diagram of FIG. 3, the IP address most recently negotiated between the wireless communication
30 device 14 and interworking function entity 18 is the IP address which is assigned for purposes of identifying mobile terminal device 12. Accordingly, if no intermediate communications are performed between the LCP negotiation 312 and the IPCP negotiation 314, the IP address assigned for identifying mobile terminal device 12 is the IP address which was obtained during the

IPCP negotiation 308 across the Um interface between wireless communication device 14 and interworking function entity 18.

As shown in FIG. 4, when a mobile IP call is being made, mobile terminal device 12 will send an IPCP packet communication 402, including a request for a static address, to wireless communication device 14. This IPCP packet communication 402 occurs after the LCP communication 312 shown in the protocol flow diagram of FIG. 3. If mobile IP is supported by wireless communication device 14, wireless communication device 14 will assert a flow control on mobile terminal device 12 by forwarding an assert flow control communication 404. Thereafter, wireless communication device 14 will perform an IPCP renegotiation 406 with interworking function 18 using the static IP address and other options in the IPCP packet communication 402. After that renegotiation, wireless communication device will forward a deassert flow control communication 408 to mobile terminal device 12, at which point the flow control is deasserted. Then, an IPCP negotiation 410 will be performed between mobile terminal device 12 and wireless communication device 14. Accordingly, during the flow control, wireless communication device 14 performs an IPCP renegotiation in order to establish an IP link with interworking function 18 to reestablish the Um (second) interface network link (IP link) carried by the Um (second) interface data link using the static IP address. After the flow control, the mobile terminal device 12 performs an IPCP negotiation to form an IP link with wireless communication device 14 to establish the Rm (first) interface network link carried by the Rm (first) interface data link using the static IP address. Either or both the IPCP renegotiations 406 and 410 may be partial negotiations, as part of the IPCP negotiation could have occurred previously.

Wireless communication device 14 may assert and deassert a flow control on mobile terminal device 12 in a number of ways. By way of example in the illustrated embodiment, wireless communication device 14 asserts a flow control on mobile terminal device 12 by responding with a Configure-Nak comprising hint values that will cause mobile terminal device 12 to respond with other Configure-Request packets that are sure to be rejected by wireless communication device 14. This can be done until such time as the flow control

is to be terminated, at which point a deassertion is caused by providing valid values to mobile terminal device 12 in order to complete the negotiation.

FIG. 5 illustrates the flow of a protocol for establishing a packet network call over a transmission link extending between mobile terminal device 12 and interworking function 18 via a wireless communication device 14. The transmission link connects mobile terminal device 12 to a wireless communication device 14 over a first interface which comprises the Rm interface, and further connects wireless communication device 14 to interworking function 18 over a second interface which comprises the Um interface. The packet network call, once established, comprises a first interface data link formed within a data link layer across the Rm interface, and a second interface data link formed within the data link layer across the Um interface.

The establishment of data and packet links between a mobile terminal device 12 and a network via interworking function 18 is initiated by mobile terminal device 12. More specifically, mobile terminal device 12 will send an LCP configure request packet 502 to mobile communication device 14. Mobile communication device 14 will then forward an assert flow control communication 504 to mobile terminal device 12, at which point a flow control will be performed on mobile terminal device 12. During this flow control, wireless communication device 14 will then perform an LCP negotiation 518 with interworking function 18 to establish the Um (second) interface data link (a PPP link) with interworking function 18. Then, a deassert flow control communication 506 is sent from wireless communication device 14 to mobile terminal device 12, at which point the flow control will be terminated. Then, an LCP negotiation 508 is performed between mobile device 12 and wireless communication device 14 to establish a PPP link which comprises the Rm (first) interface data link between wireless communication device 14 and mobile terminal device 12.

After the Rm interface data link is established between wireless communication device 14 and mobile terminal device 12, mobile terminal device 12 sends an IPCP configuration request packet 510 to wireless communication device 14. Mobile terminal device 14 then forwards an assert flow control communication 512 to mobile terminal device 12, at which point a flow control is performed on mobile terminal device 12. During that flow

control, wireless communication device 14 performs an IPCP negotiation 520 with interworking function 18 to establish a Um (second) interface network link (IP link within the network layer) carried by the second interface data link. One of the results of this negotiation will include an IP address which is assigned to
5 identify mobile terminal device 12. Then, a deassert flow control communication 514 will be sent from wireless communication device 14 to mobile terminal device 12, at which point the flow control will be terminated. Thereafter, after the Rm interface data link is established between wireless communication device 14 and mobile terminal device 12, and after the Um
10 interface network link is established between wireless communication device 14 and interworking function 18, mobile terminal device 12 will perform an IPCP negotiation 516 with mobile terminal device 12 to establish a Rm (first) interface network link (an IP link within the network layer) carried by the Rm (first) interface data link, using the IP address obtained during the IPCP negotiation
15 520 between wireless communication device 14 and interworking function 18. Of course, any of the negotiations shown in the protocol illustrated in FIG. 5 may be partial negotiations, as part of such negotiations could have occurred at earlier points in time.

While the invention has been described with reference to several
20 illustrated embodiments, it is understood that the words which have been used herein are words of description, rather than words of limitation. Changes may be made, within the purview of the appended claims, without departing from the scope and spirit of the invention. Although the invention has been described herein with reference to particular materials, structures, and
25 embodiments, it is understood that the invention is not to be limited to the particulars disclosed, but rather extends to all appropriate equivalent structures, methods, and uses.

We claim:

CLAIMS

1. A method for establishing a packet network call over a transmission
link extending between a mobile terminal device and an interworking function,
said transmission link connecting said mobile terminal device to a wireless
communication device over a first interface and further connecting said
wireless communication device to said interworking function over a second
interface via a wireless link to a base station, said packet network call, once
established, comprising a first interface data link formed within a
predetermined data link layer across said first interface and a second interface
data link formed within said predetermined data link layer across said second
interface, said method comprising:
 - asserting and deasserting at one or more certain times a flow
control on said mobile terminal device; - during said flow control, said wireless communication device
performing a link control protocol negotiation with said interworking function
to establish said second interface data link with said interworking function; - after said second interface data link is established, and during a
flow control on said mobile terminal device, said wireless communication
device performing a network control protocol negotiation with said
interworking function to establish a second interface network link carried by
second interface data link, resulting in an IP address being assigned to identify
said mobile terminal device; - after said second interface data link is established, said mobile
terminal device performing a link control protocol negotiation with said
wireless communication device to establish said first interface data link with
said wireless communication device; and - after said first interface data link is established and after said
second interface network link is established, said mobile terminal device
performing a network control protocol negotiation with said wireless
communication device to establish a first interface network link carried by said
interface data link, using said IP address.

2 2. The method according to claim 1, wherein said second interface
network link is established before said first interface data link is established.

2 3. The method according to claim 1, wherein said first interface data link
is established before is said second interface network link established.

2 4. The method according to claim 1, further comprising other acts
performed after said first interface data link and said second interface network
link are both established, when said wireless communication device receives
4 from said mobile terminal device a request for a static IP address, said other
acts comprising:

6 during a flow control on said mobile terminal device, said
wireless communication device performing a network control protocol
8 renegotiation with said interworking function to reestablish said second
interface network link carried by said second interface data link using said
10 static IP address; and

 said mobile terminal device thereafter performing a network
12 protocol negotiation with said wireless communication device to establish said
first interface network link carried by said first interface data link using said
14 static IP address.

2 5. The method according to claim 4, further comprising determining
whether mobile IP is supported by said wireless communication device, and
not performing said other acts when said mobile IP is not supported.

2 6. The method according to claim 5, wherein said mobile terminal device
comprises an IS-707 TE2 device, said interworking function entity comprises an
IS-707 IWF entity, and said wireless communication device comprises an IS-707
4 MT2 device, and wherein said first and second interfaces respectively comprise
Rm and Um interfaces.

2 7. The method according to claim 4, wherein said interworking function
comprises a gateway or bridge connection to a packet network.

8. The method according to claim 7, wherein said packet network
2 comprises the Internet.

9. The method according to claim 1, wherein said transmission link
2 comprises an IS-707 link in network model mode.

10. The method according to claim 9, wherein said first interface
2 comprises an Rm interface.

11. The method according to claim 10, wherein said second interface
2 comprises a Um interface.

12. The method according to claim 11, wherein said link control protocol
2 negotiation comprises an LCP negotiation to create a PPP link.

13. The method according to claim 12, wherein said second interface
2 data link comprises a PPP link.

FIG. 1

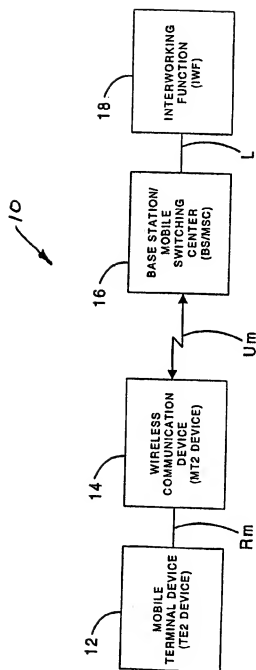


FIG. 2




FIG. 3

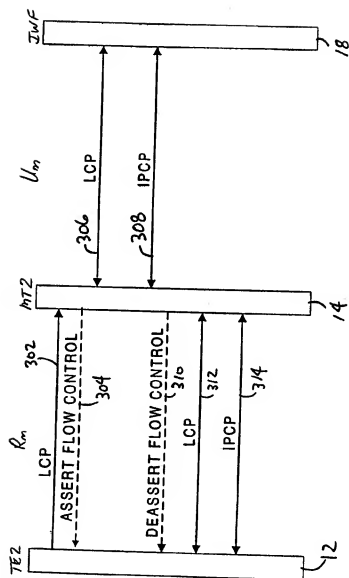


FIG. 4


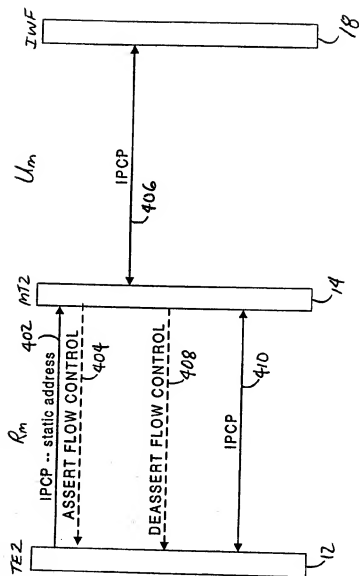


FIG. 5

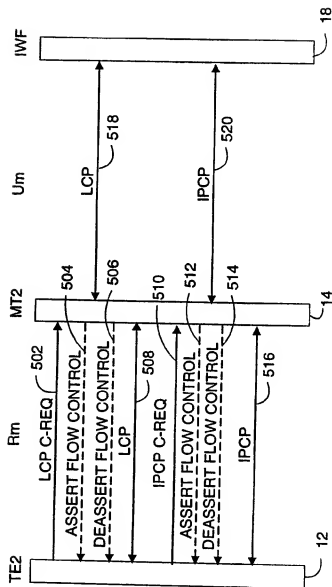

INTERNATIONAL SEARCH REPORT

Intern 7 Application No

PCT/US 00/15662

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04L29/06 H0407/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 917 328 A (LUCENT TECHNOLOGIES INC) 19 May 1999 (1999-05-19) page 7, line 17 - line 46 page 8, line 24 - line 25 page 9, line 43 - line 55 page 15, line 56 -page 16, line 5 ---	1-13
X	WO 97 48246 A (ERICSSON TELEFON AB L M) 18 December 1997 (1997-12-18) page 11, line 20 -page 12, line 4 page 12, line 21 -page 13, line 2 --- -/-	1-13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 October 2000

Date of mailing of the international search report

30/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel: (+31-70) 340-2040, Tx: 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer:

Heinrich, D

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/15662

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"THE POINT-TO-POINT PROTOCOL (PPP)" RFC 1661, 'Online! July 1994 (1994-07), pages 1-47, XP002150336 Retrieved from the Internet: <URL:http://www.cis.ohio-state.edu/htbin/r fc/rfc1661.htm> 'retrieved on 2000-10-17! cited in the application page 3, line 17 - line 34 page 8, line 14 - line 31 -----</p>	1-13

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/15662

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0917328 A	19-05-1999	CA 2249817 A	14-04-1999
		CA 2249830 A	14-04-1999
		CA 2249831 A	14-04-1999
		CA 2249836 A	14-04-1999
		CA 2249837 A	14-04-1999
		CA 2249838 A	14-04-1999
		CA 2249839 A	14-04-1999
		CA 2249862 A	14-04-1999
		CA 2249863 A	14-04-1999
		EP 0912026 A	28-04-1999
		EP 0910198 A	21-04-1999
		EP 0917320 A	19-05-1999
		EP 0917318 A	19-05-1999
		EP 0912027 A	28-04-1999
		EP 0912012 A	28-04-1999
		EP 0918417 A	26-05-1999
		EP 0912017 A	28-04-1999
		JP 11289353 A	19-10-1999
		JP 11252183 A	17-09-1999
		JP 11275154 A	08-10-1999
		JP 11275155 A	08-10-1999
		JP 2000022758 A	21-01-2000
		JP 11275156 A	08-10-1999
		JP 11275157 A	08-10-1999
		JP 11284666 A	15-10-1999
		JP 11331276 A	30-11-1999
W0 9748246 A	18-12-1997	US 5708655 A	13-01-1998
		AU 718114 B	06-04-2000
		AU 3199797 A	07-01-1998
		BR 9709572 A	10-08-1999
		CA 2257981 A	18-12-1997
		CN 1228228 A	08-09-1999
		EP 0904665 A	31-03-1999

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/76173 A1(51) International Patent Classification: H04L 29/06,
H04Q 7/22

(74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(21) International Application Number: PCT/US00/15662

(22) International Filing Date: 6 June 2000 (06.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 09/327,102 7 June 1999 (07.06.1999) US


(71) Applicant: QUALCOMM INCORPORATED [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).(72) Inventors: LIOY, Marcello; 7588 Charmant Drive #1924,
San Diego, CA 92122 (US). ABROL, Nischal; 7260 Calle
Cristobal, #41, San Diego, CA 92126 (US).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

With international search report.

[Continued on next page]

(54) Title: ESTABLISHING A PACKET NETWORK CALL BETWEEN A MOBILE TERMINAL DEVICE AND AN INTERWORKING FUNCTION



(57) Abstract: A method or system (10) establishes a packet network call over a transmission link extending between a mobile terminal device (12) and an interworking function (18) which comprises a gateway or bridge connection to a network, such as a packet network. The transmission link connects the mobile terminal device (12) to a wireless communication device (14) over a first interface (Rm) and further connects the wireless communication device to the interworking function over a second interface via a wireless link (Um) to a base station (16). The packet network call, once established, comprises a first interface data link formed within a predetermined data link layer across the first interface (Rm) and a second interface data link formed within the predetermined data link layer across the second interface. A flow control is asserted (304) and deasserted (310) on the mobile terminal device (12). During the flow control, the wireless communication device performs a linked control protocol negotiation with the interworking function to establish the second interface data link with the interworking function (18). After the second interface data link is established, and during the flow control, the wireless communication device (14) performs a network control protocol negotiation with the interworking function to establish a second interface network link carried by the second interface data link.

WO 00/76173 A1



(48) Date of publication of this corrected version:

19 April 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 16/2001 of 19 April 2001, Section II